




【図1】

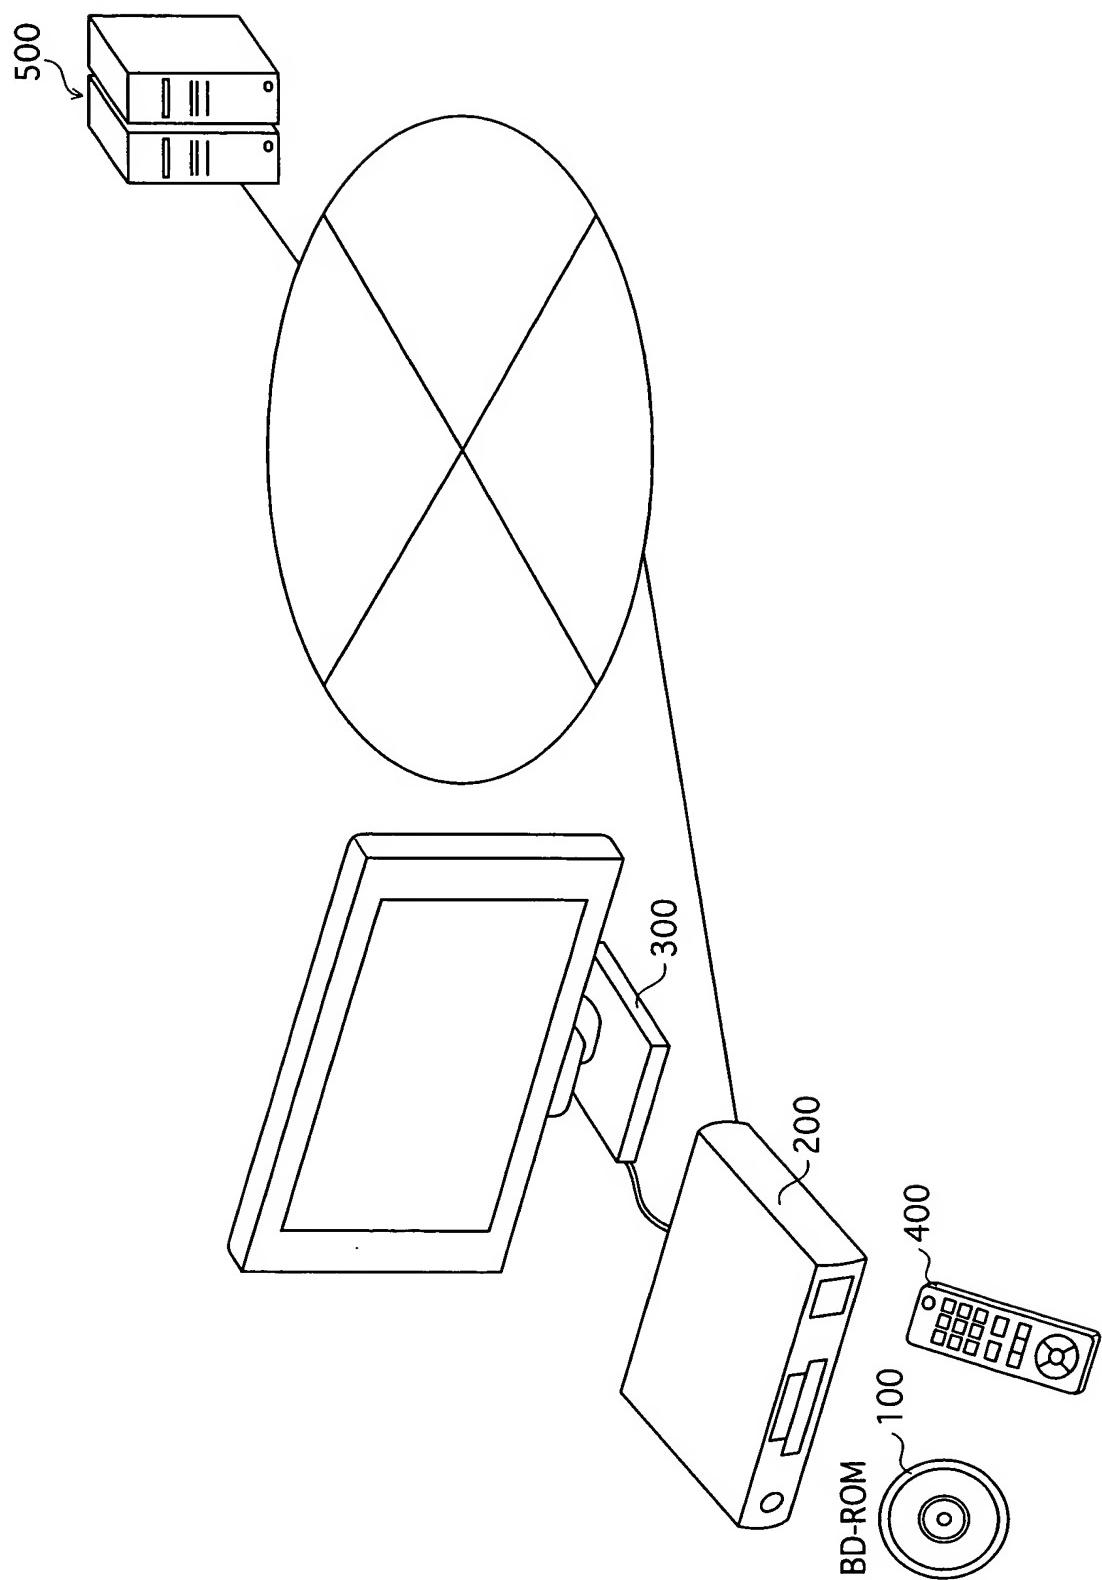

【図2】

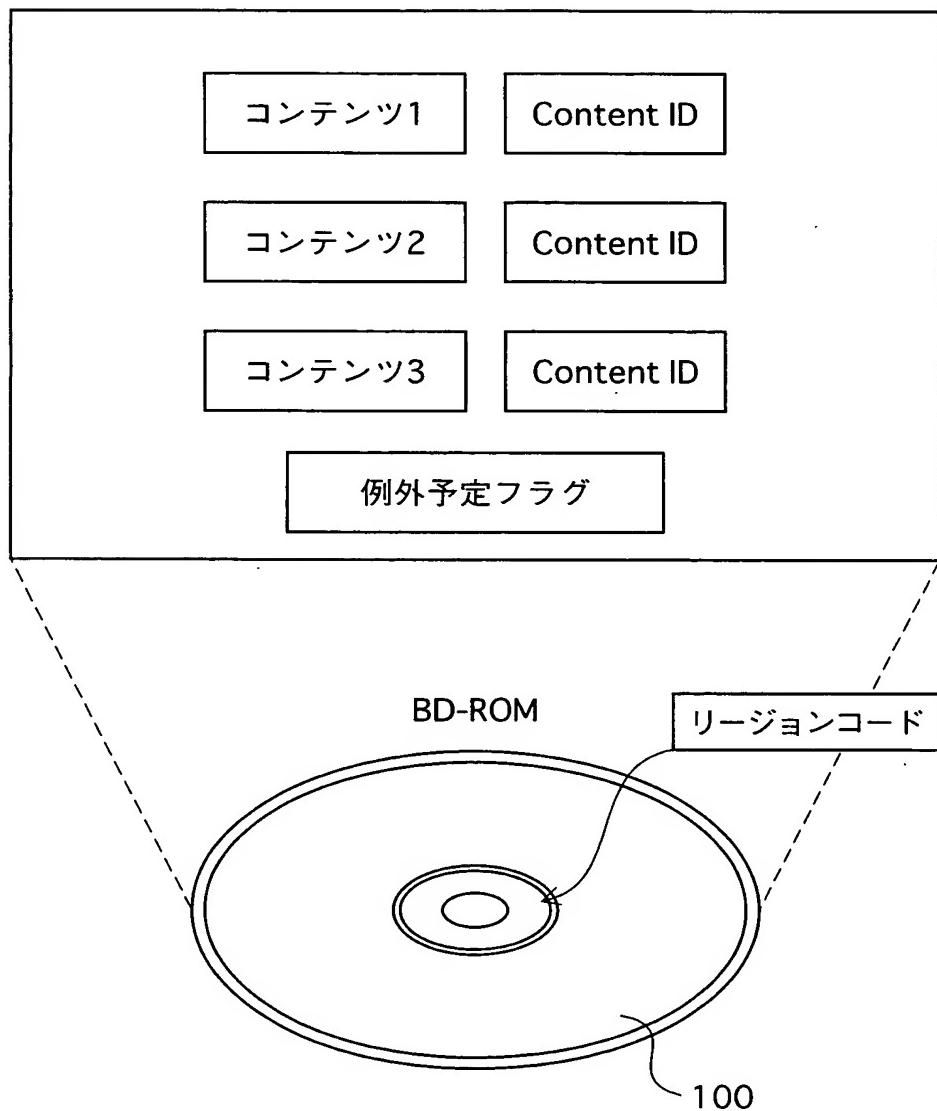

【図3】

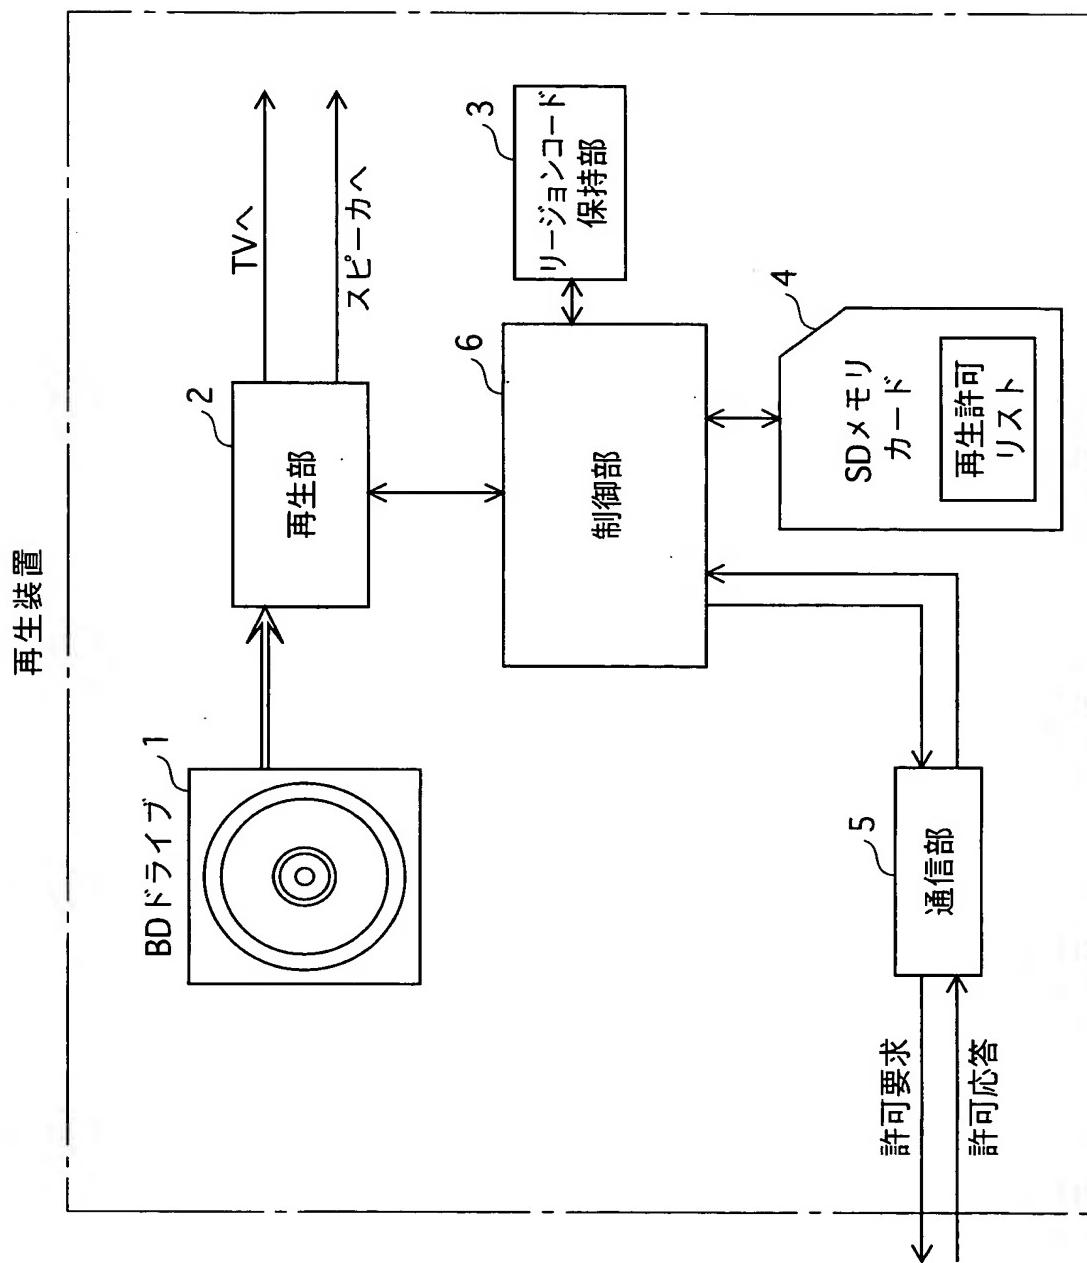


【図4】


再生許可リスト

	Content ID	Region Code	排他情報	Distribution Company情報	Release Date情報
再生許可情報1	4GH	1	排他	AAA社	10/02/2002
再生許可情報2	4GH	2	非排他	BBB社	01/23/2002
再生許可情報3	QW1	2	排他	CCC社	01/24/1998


【図5】

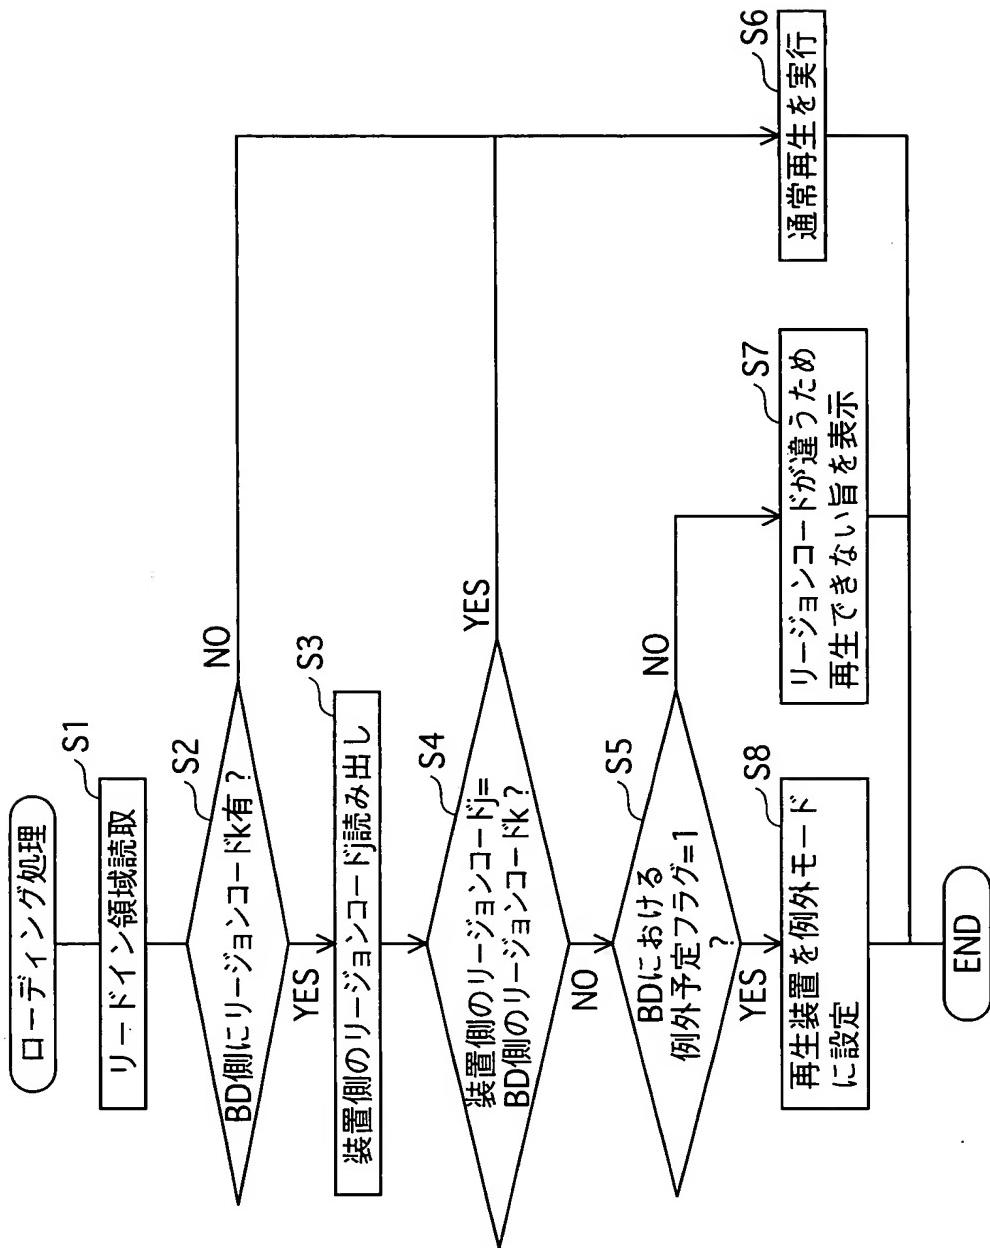


【図6】

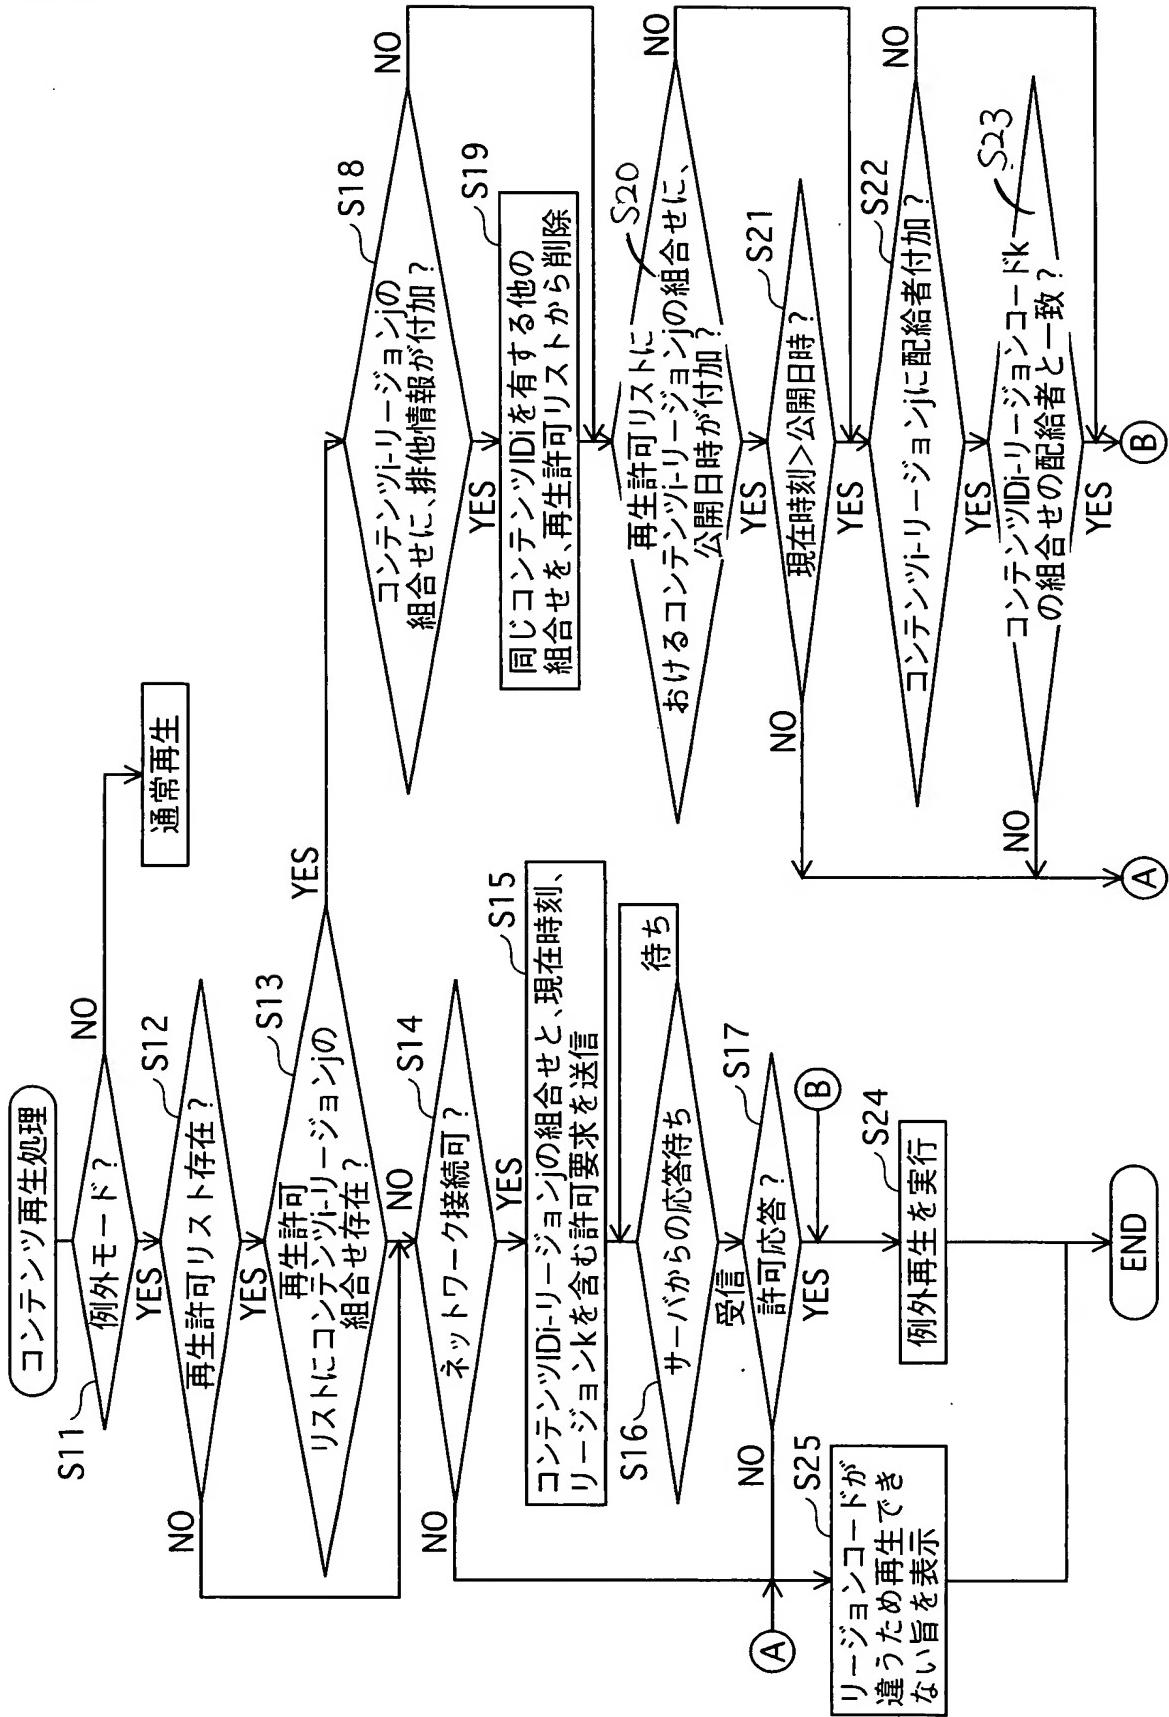


【図7】

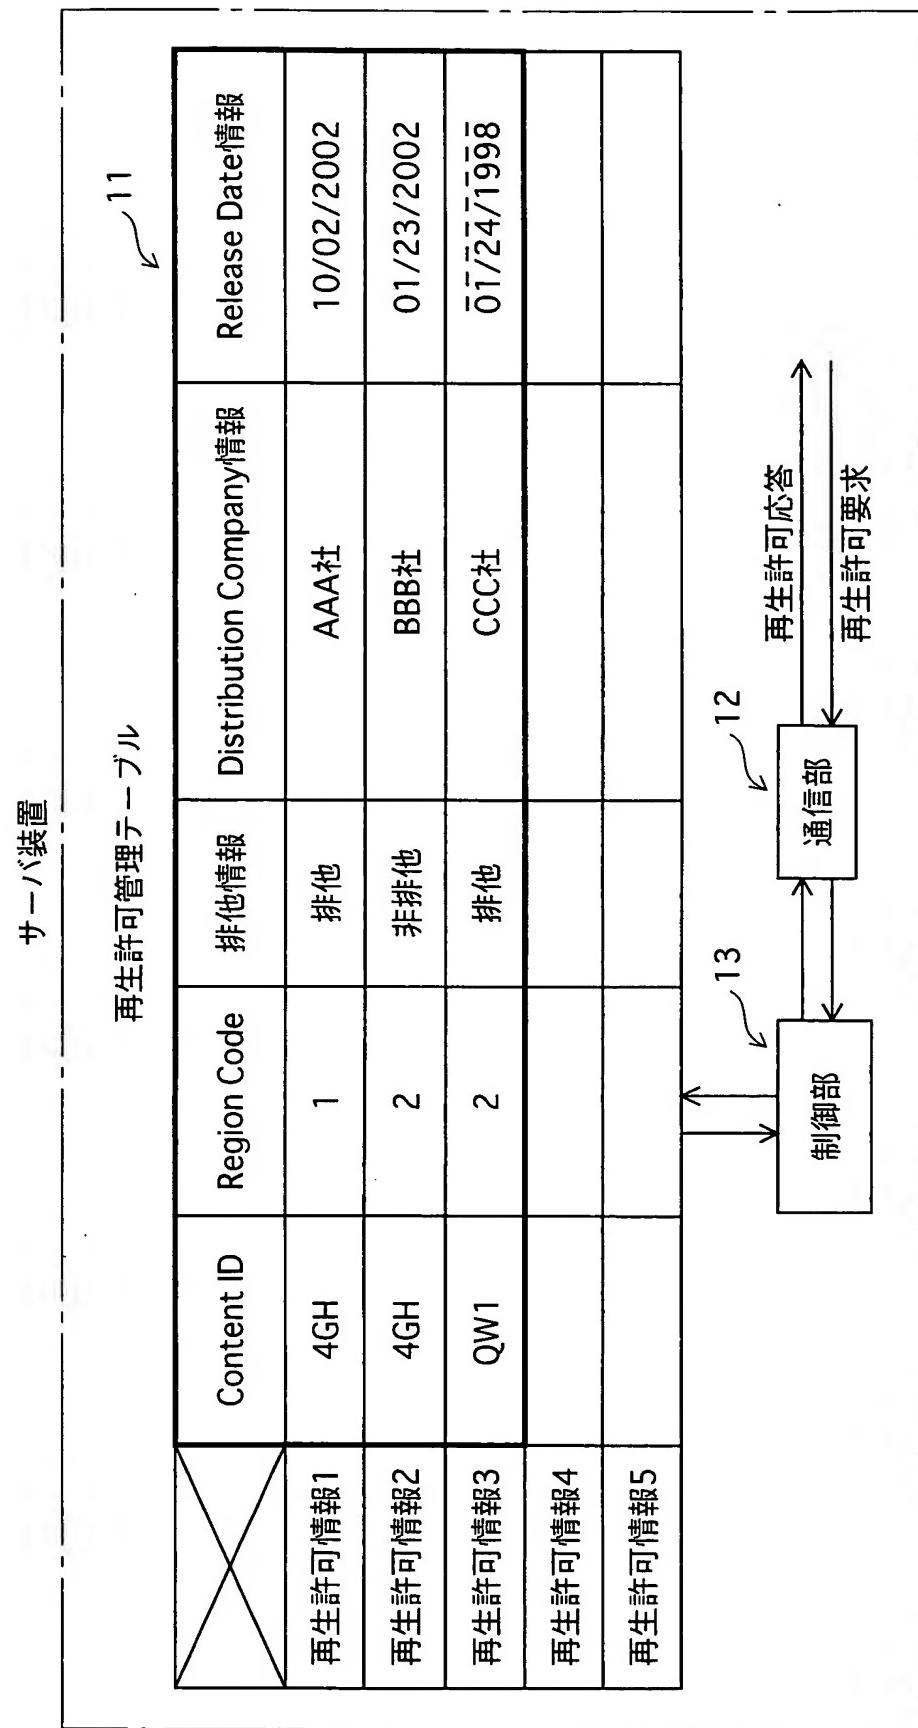

【図8】

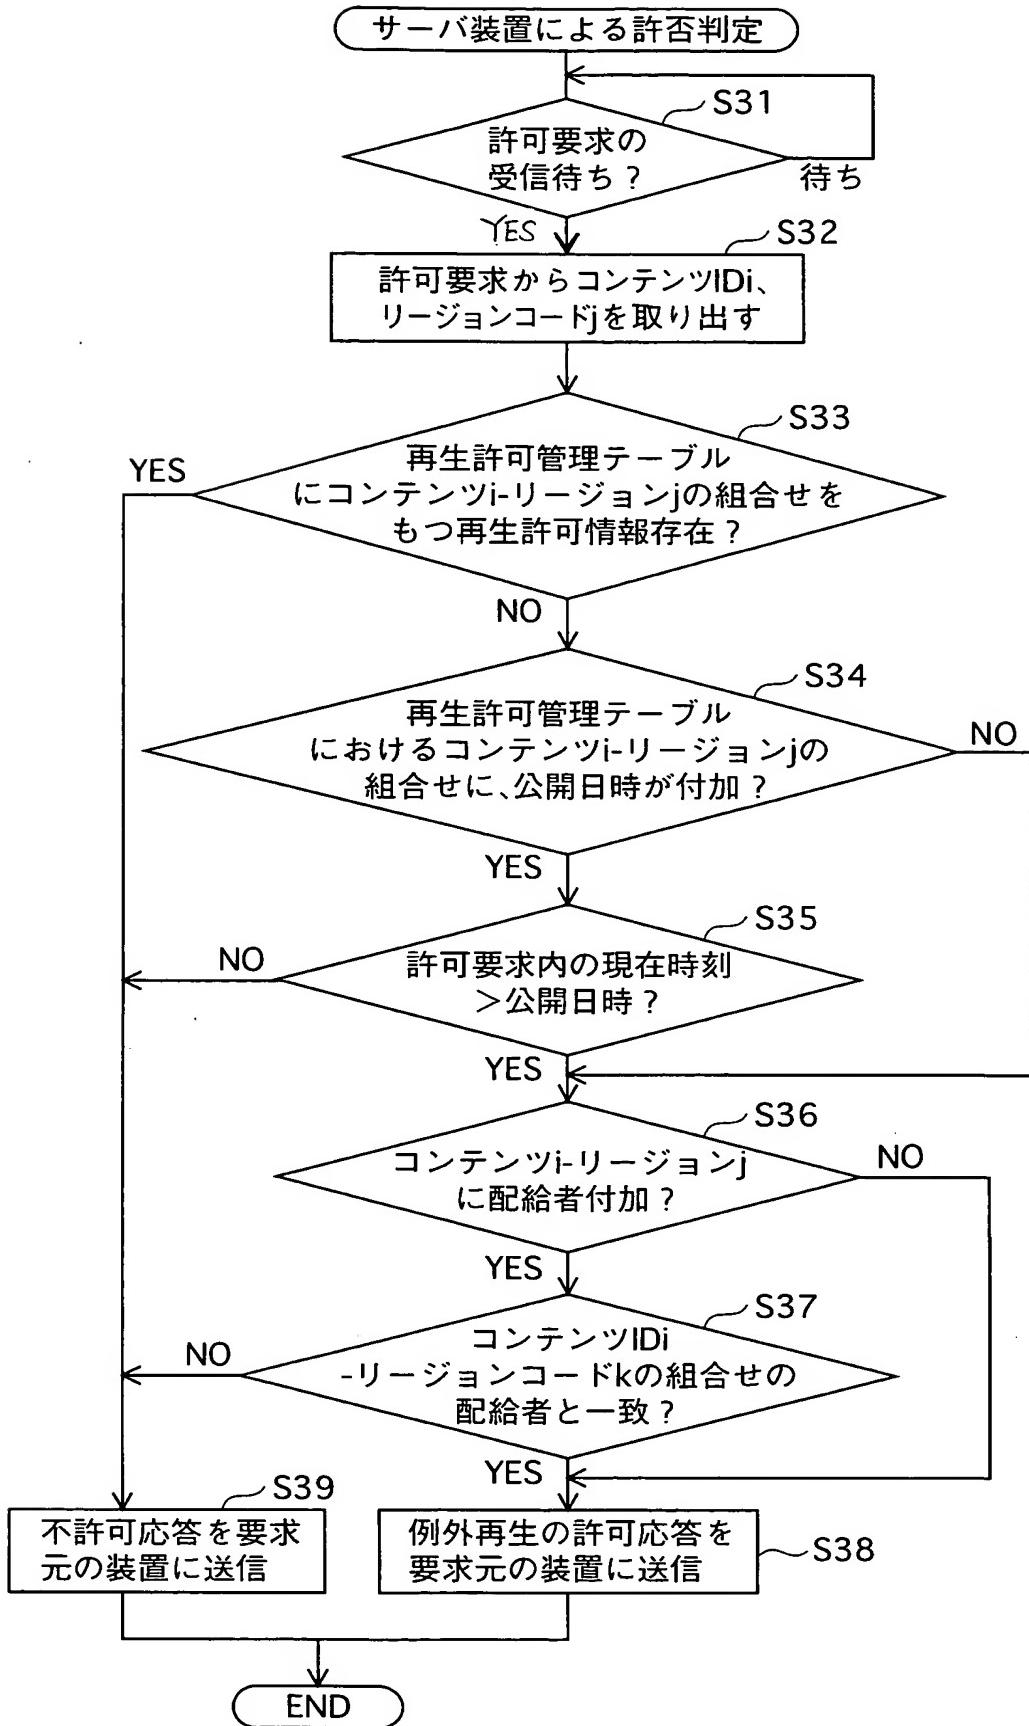


【図9】

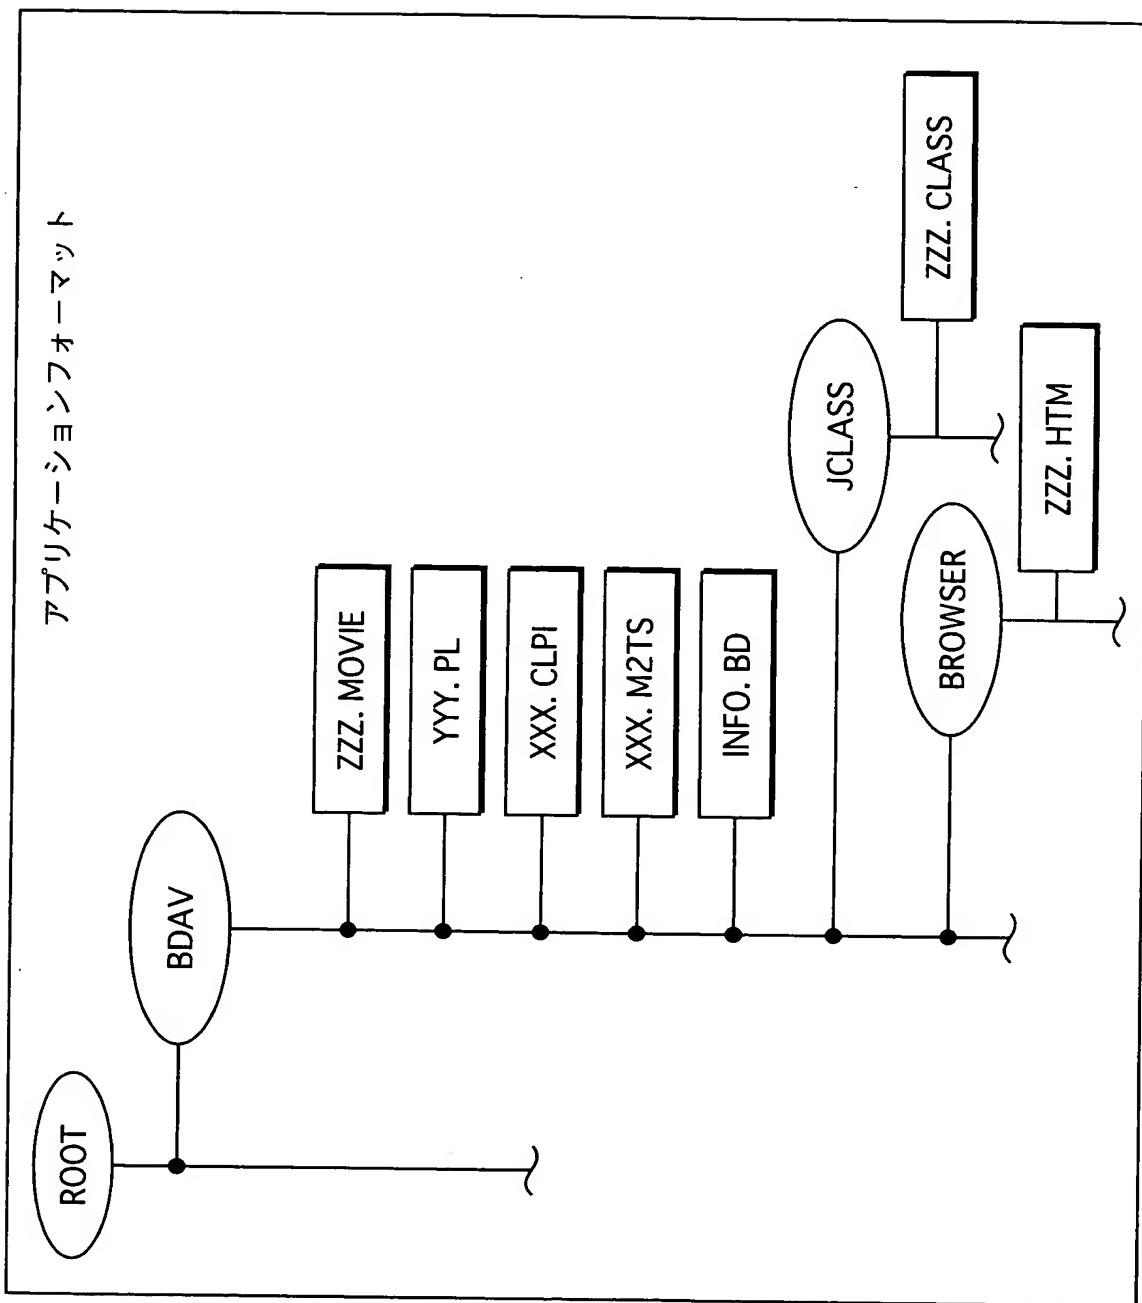


レイアモデルにおける  
ファイルの分類

【図10】

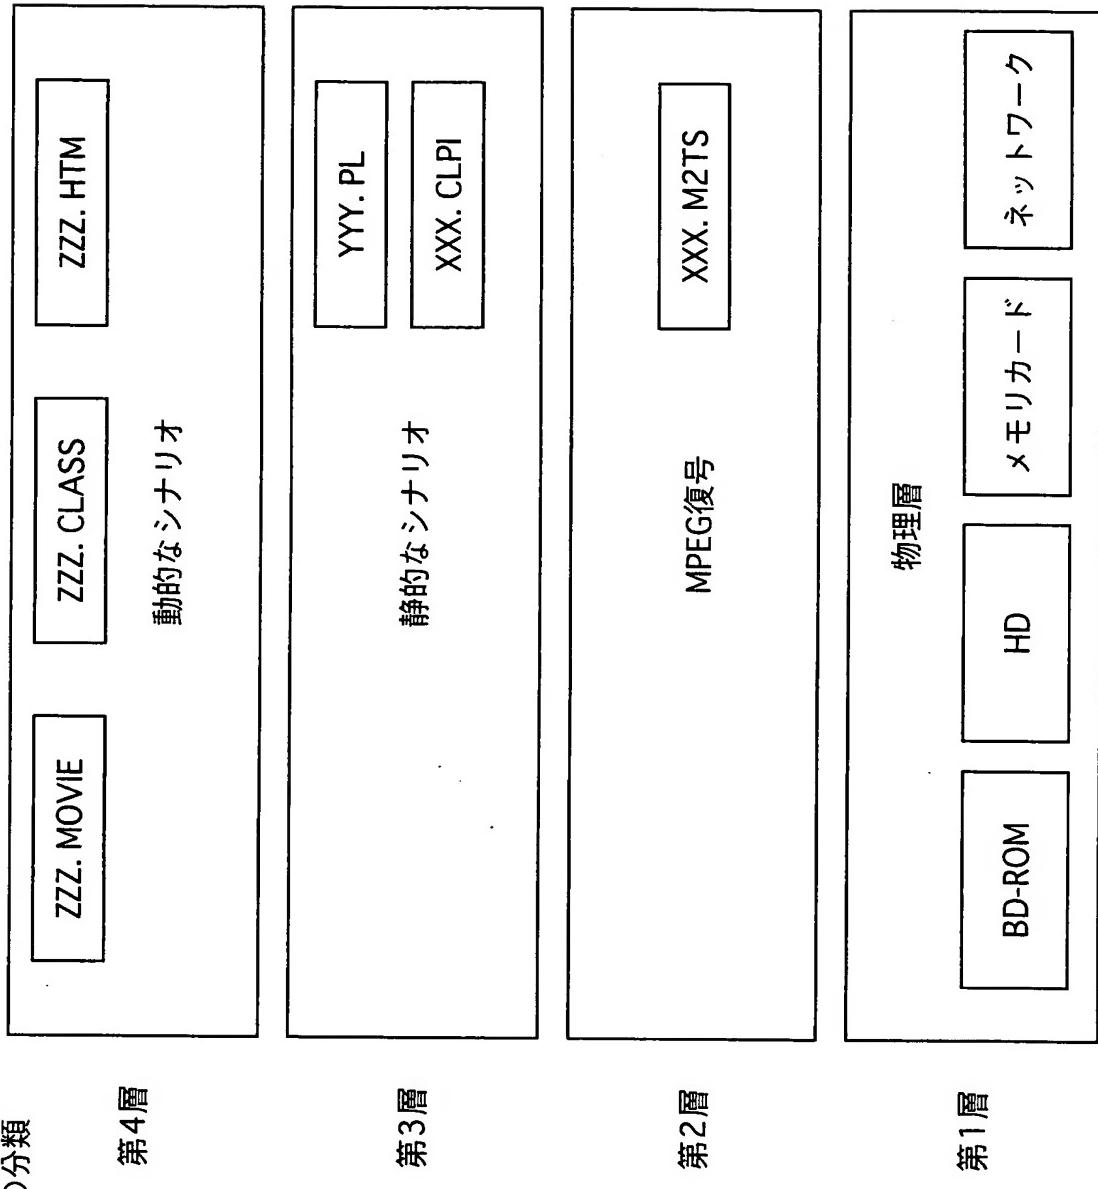


## 再生制御のレイアモール


【図11】

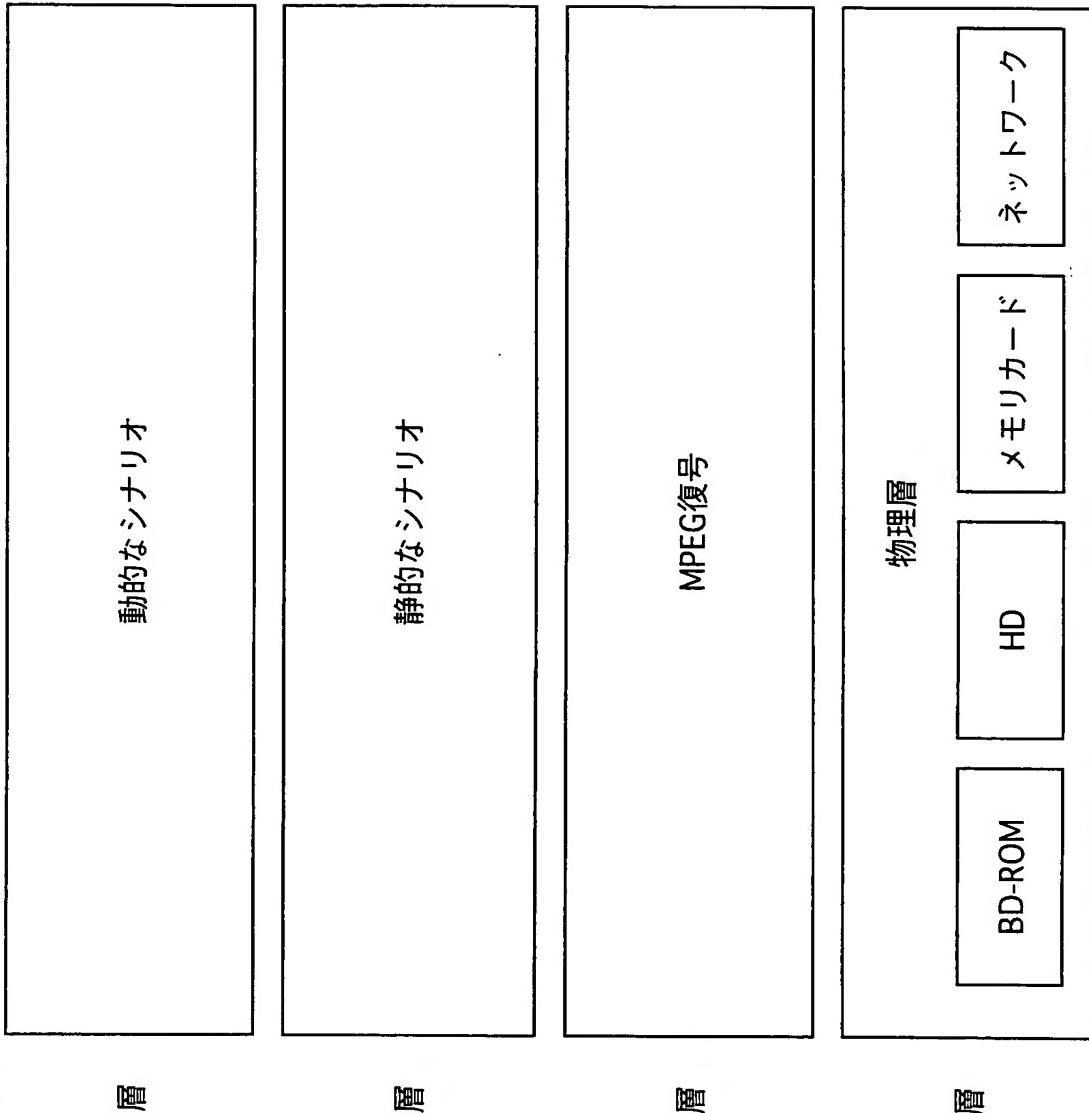


【図12】

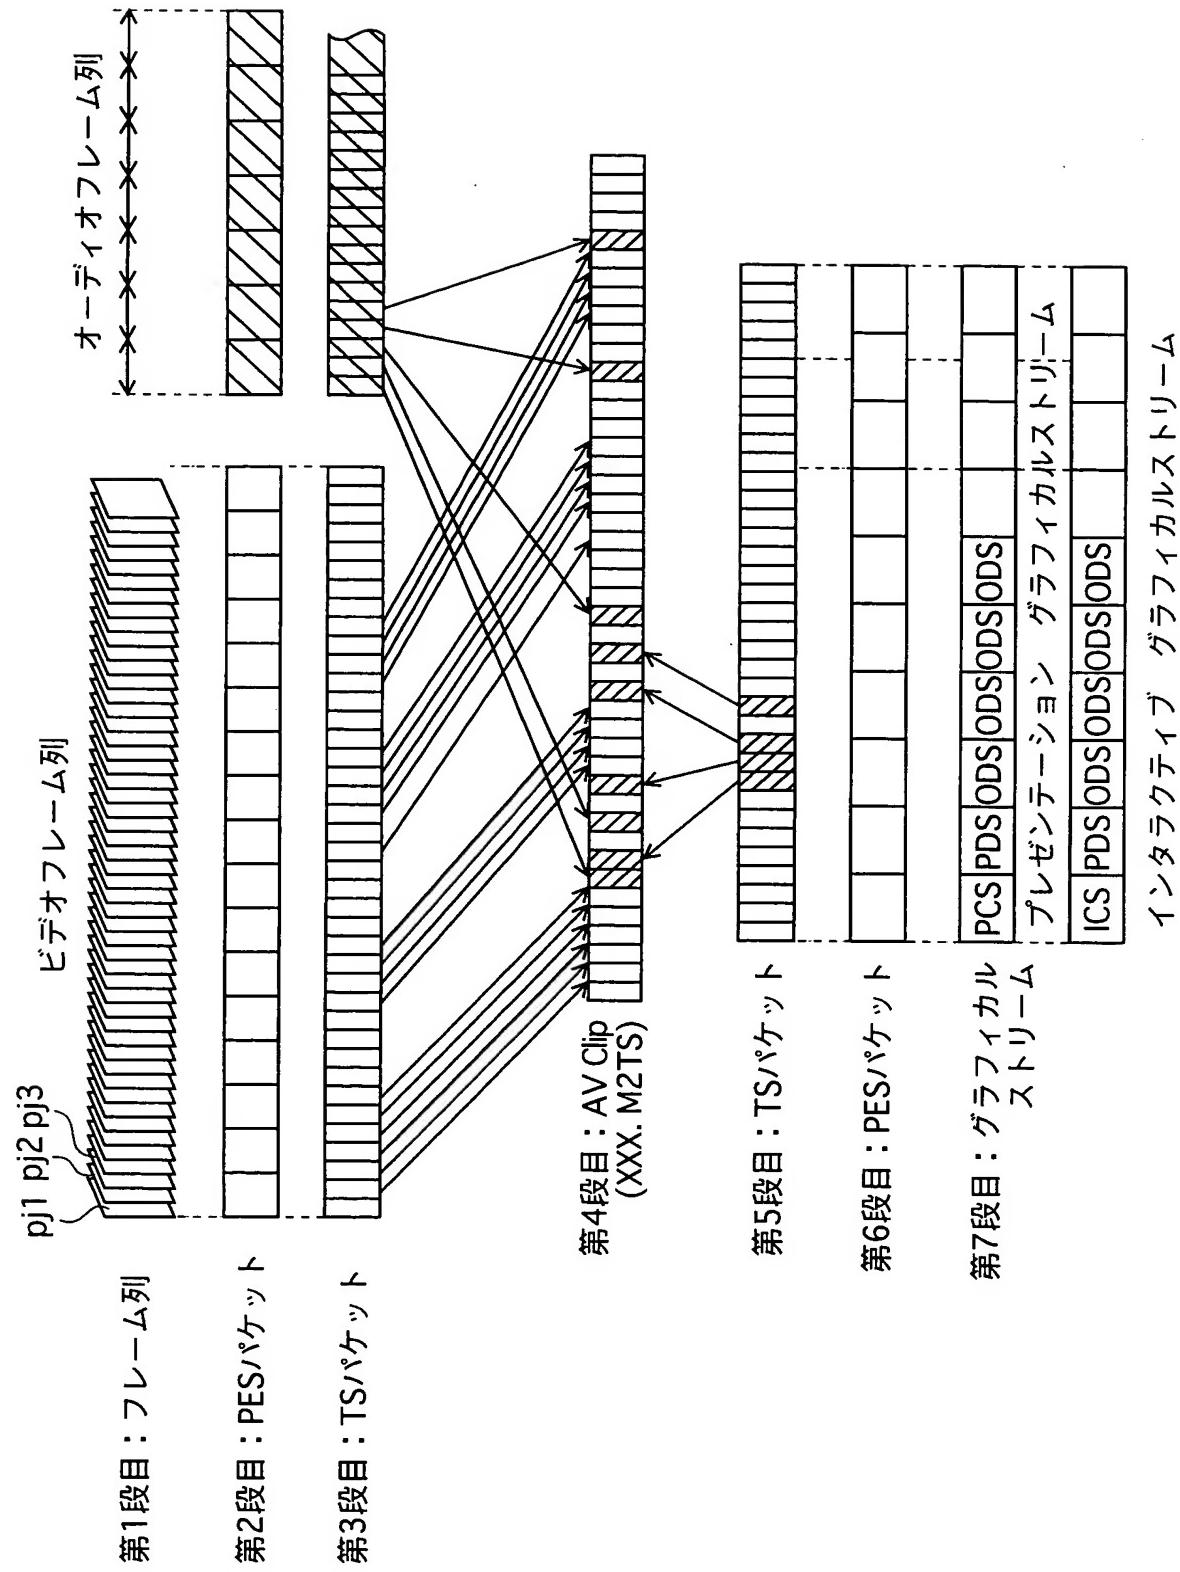


【図13】

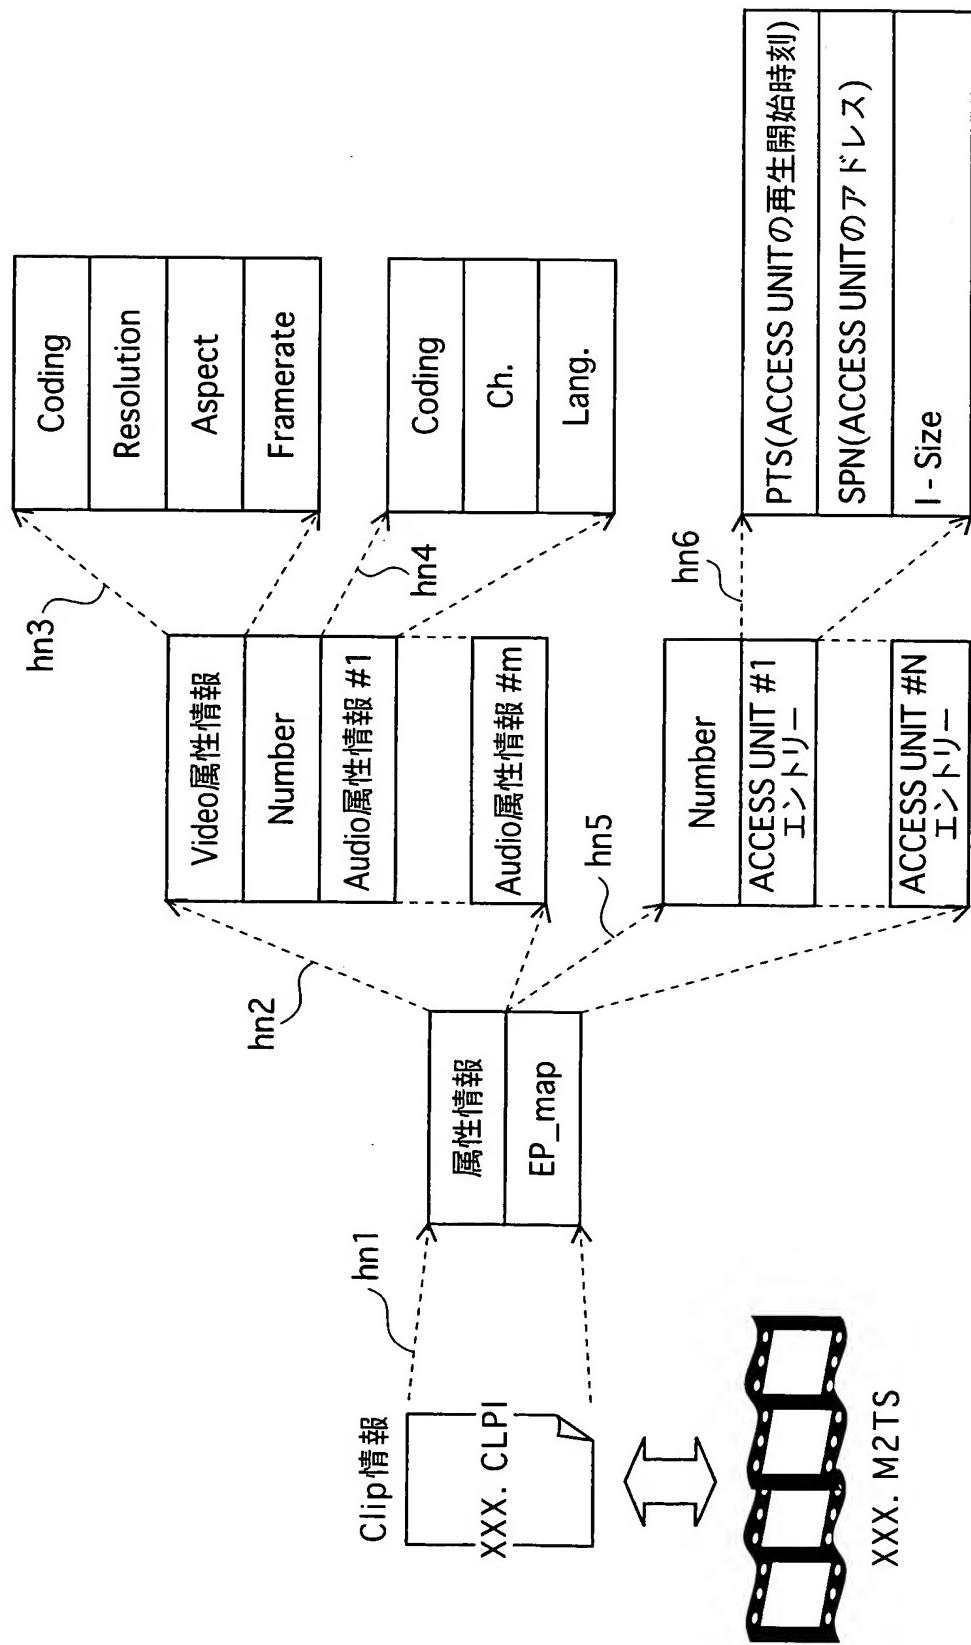

【図14】

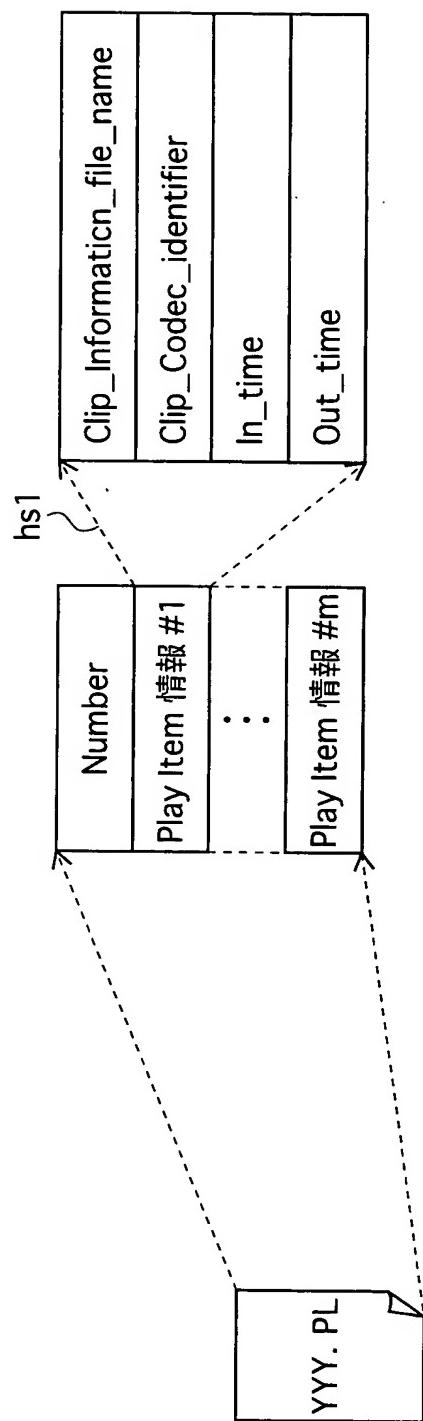


【図15】

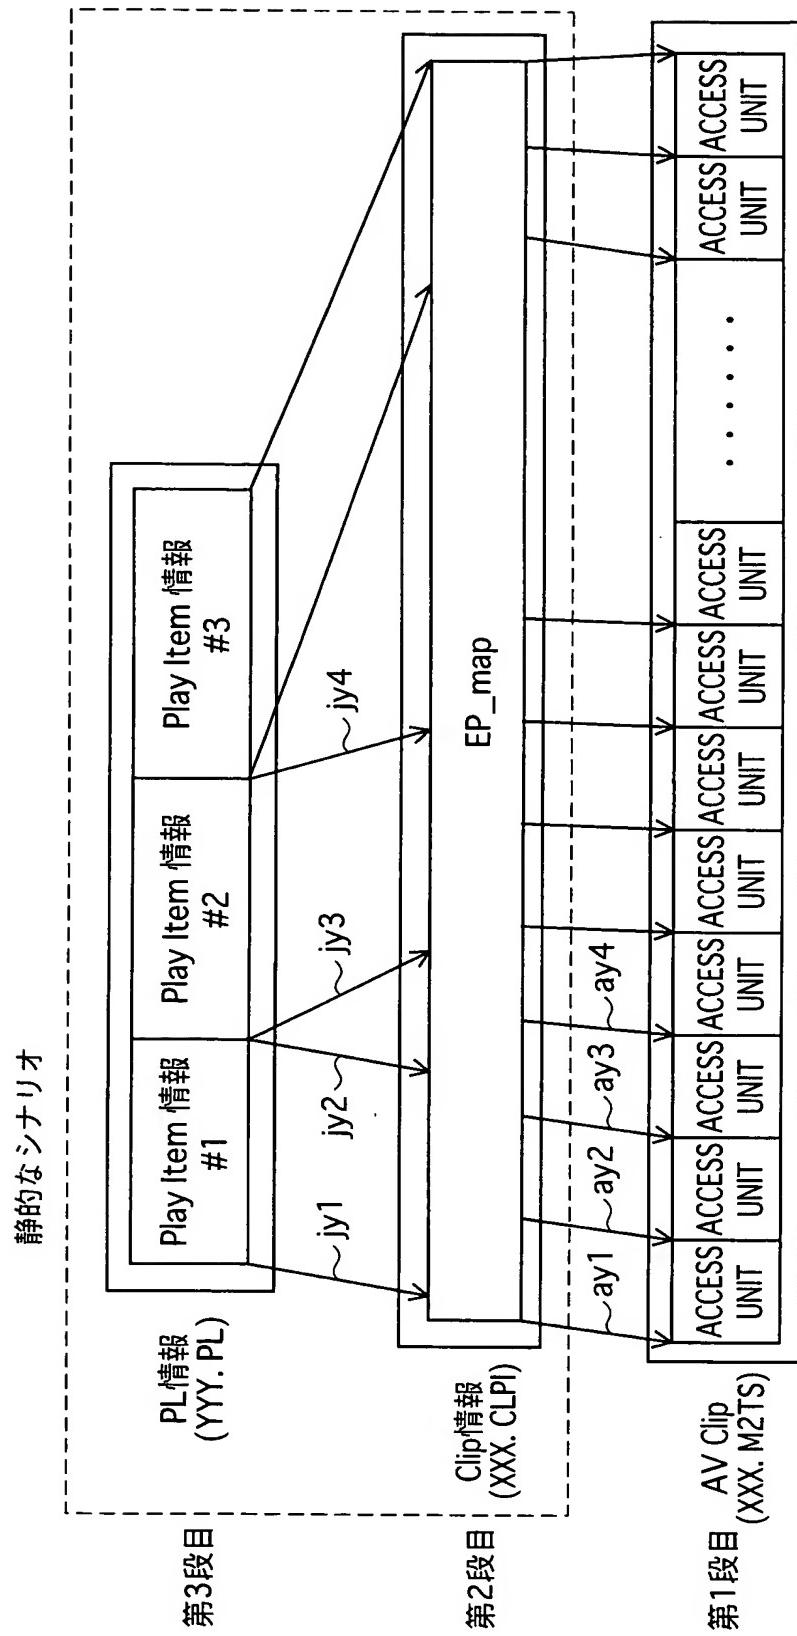


## 再生制御のレイアモデル


【図16】

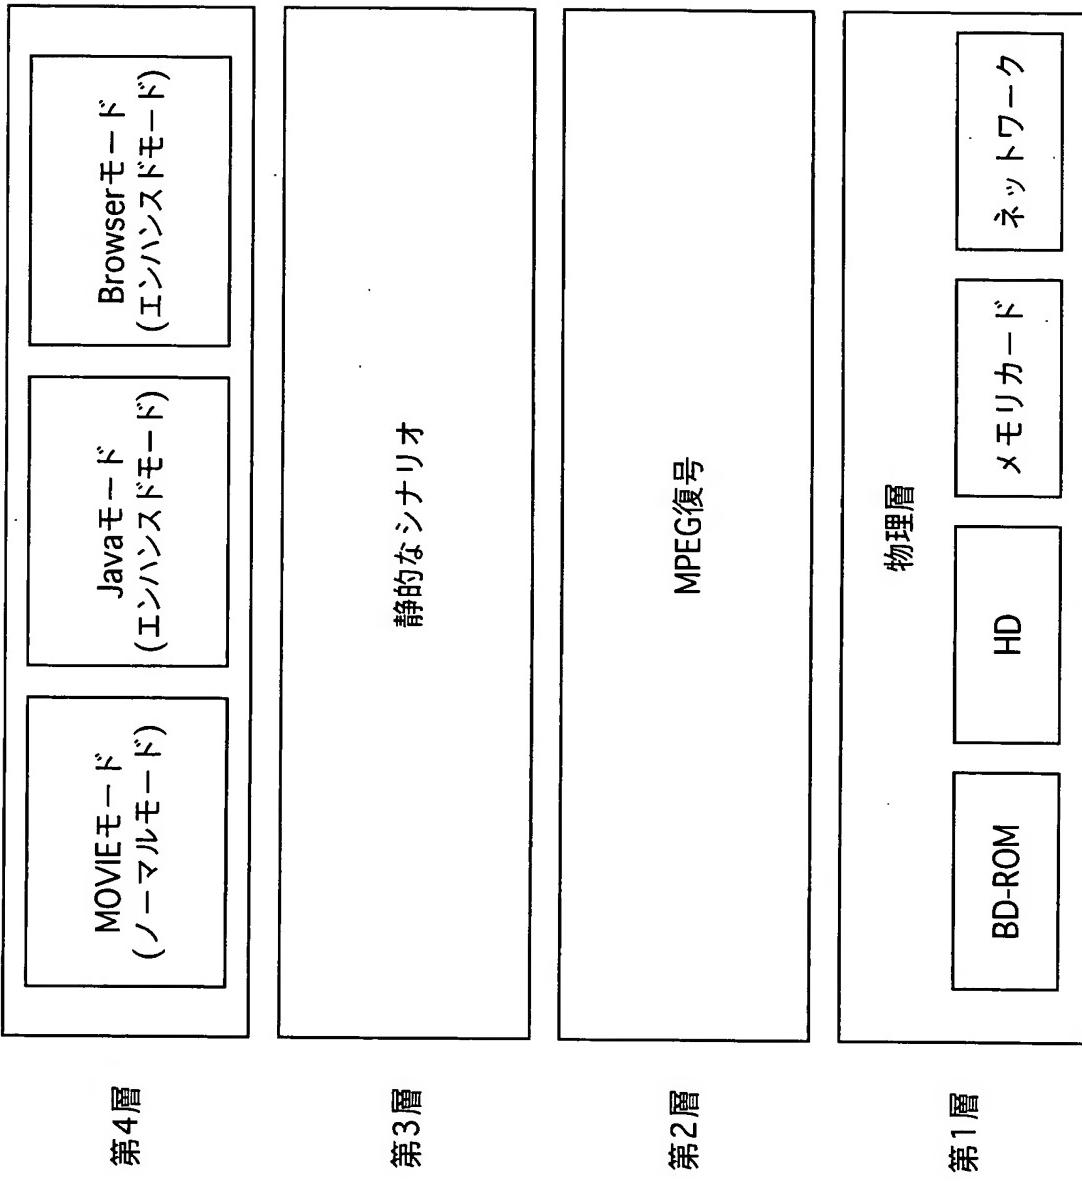


【図17】

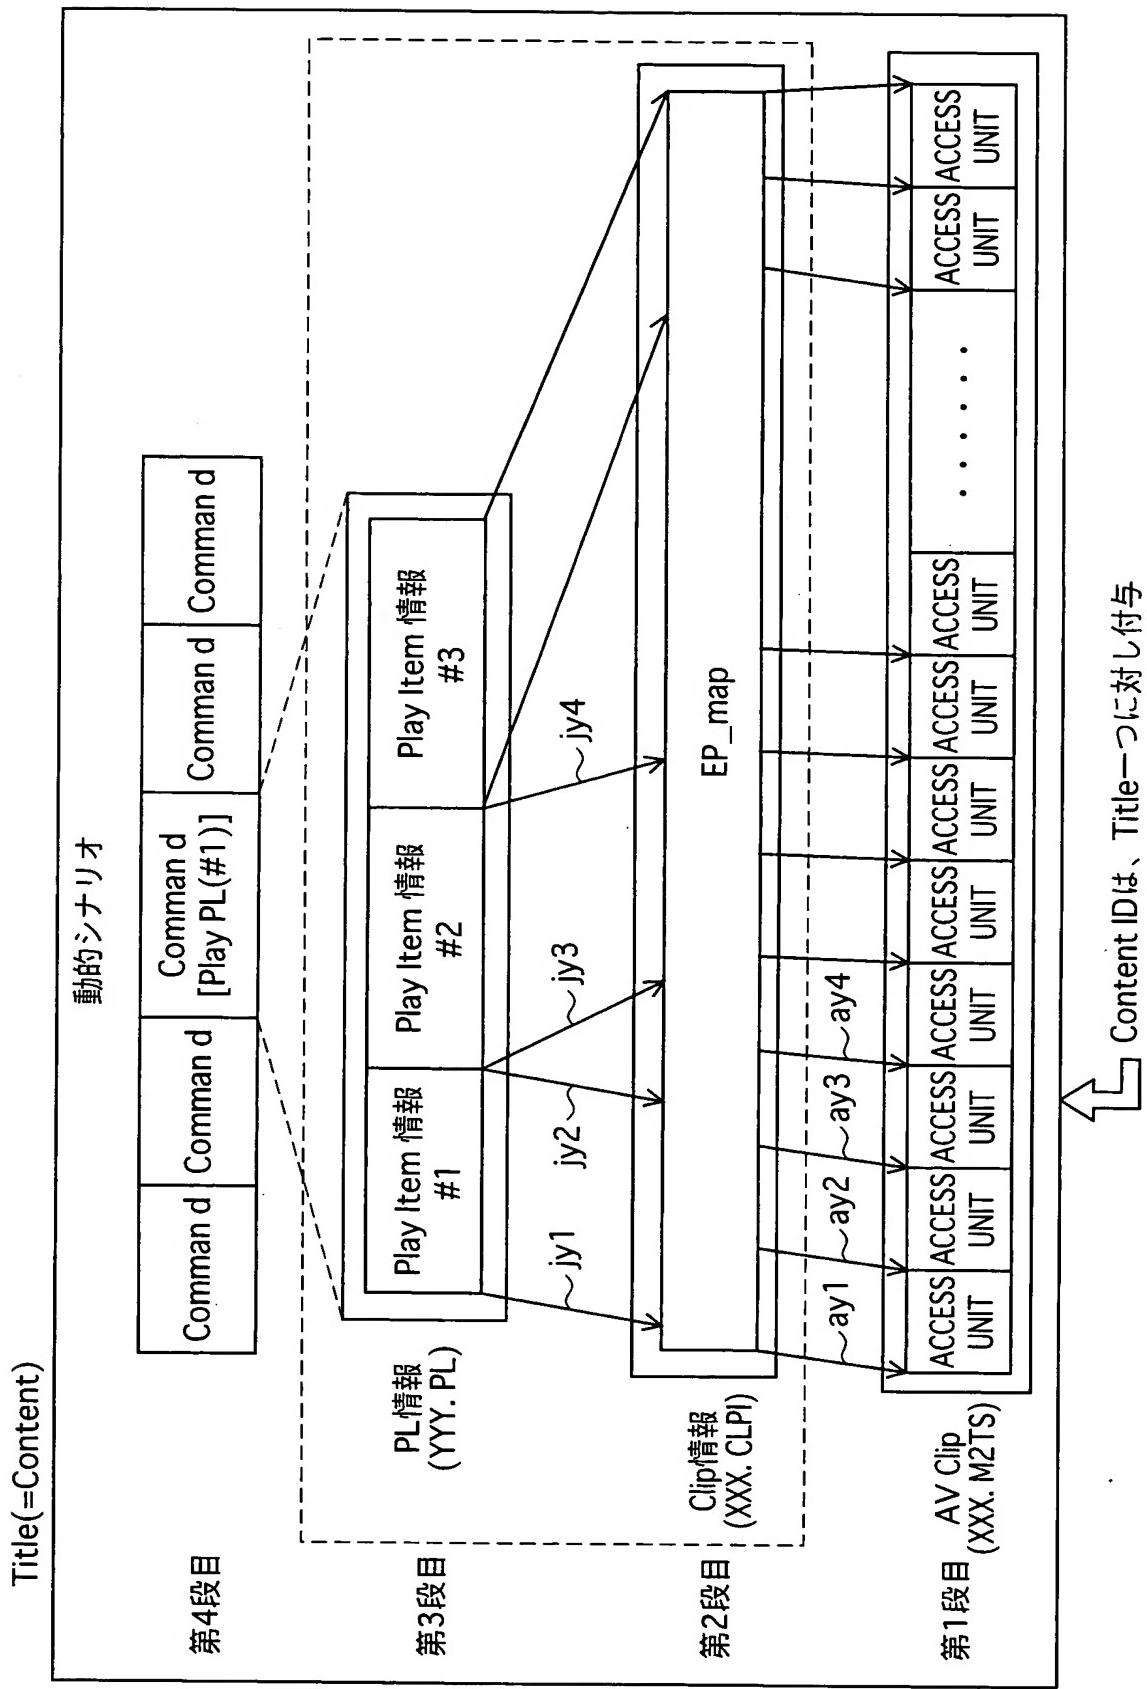

【図18】

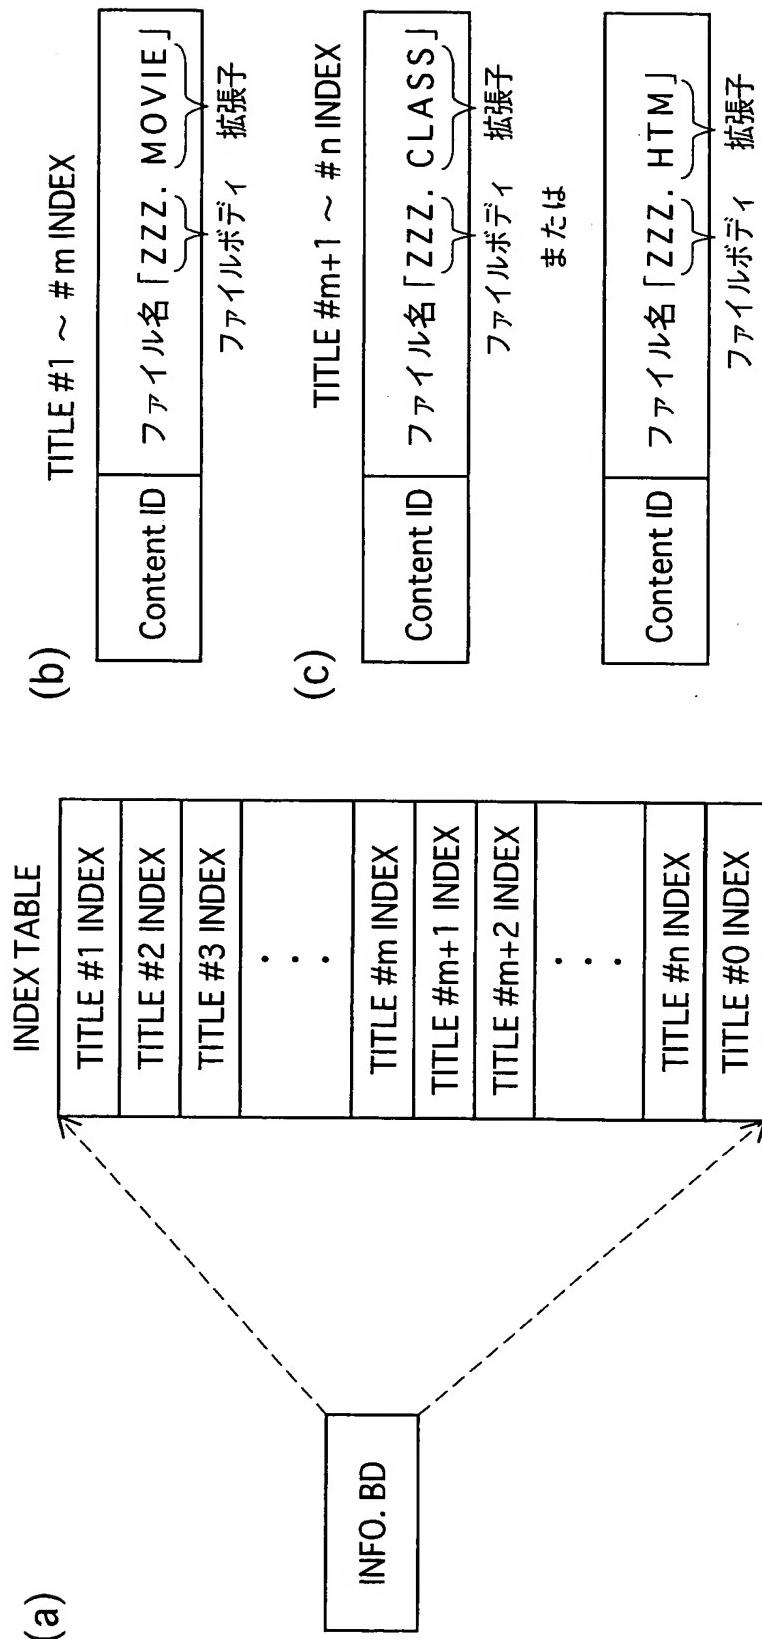


【図19】

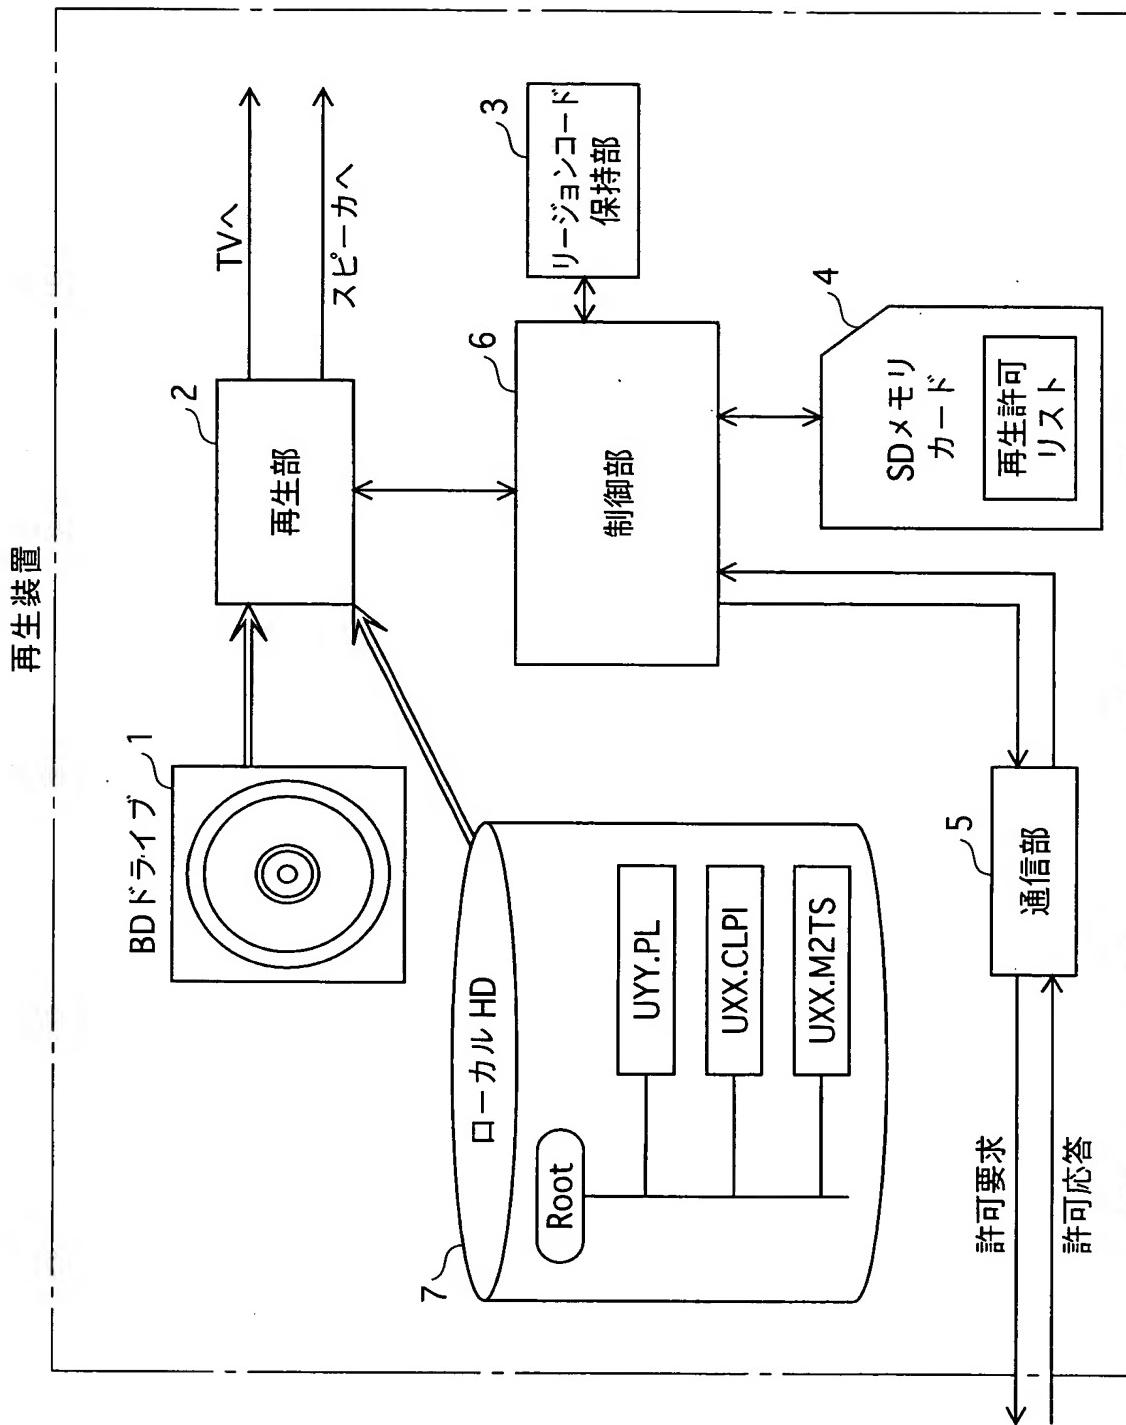


【図20】

装置側のリージョンコードに合致した  
アッピデータキッド

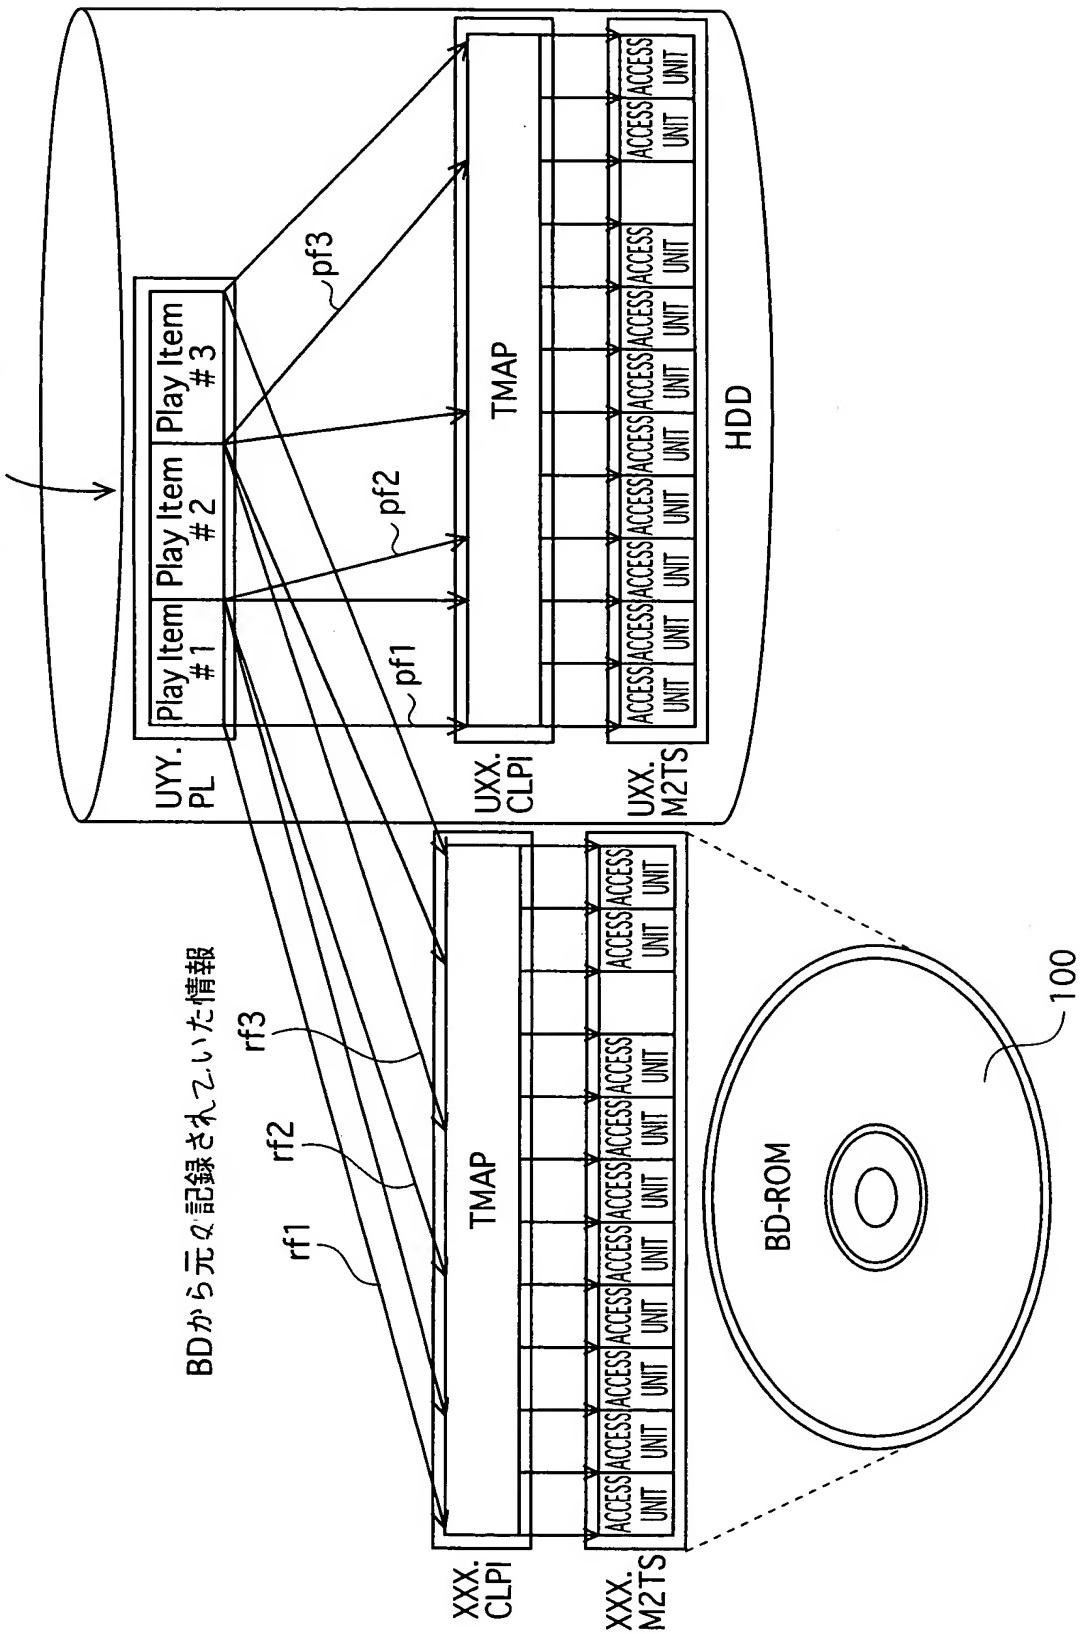


【図21】

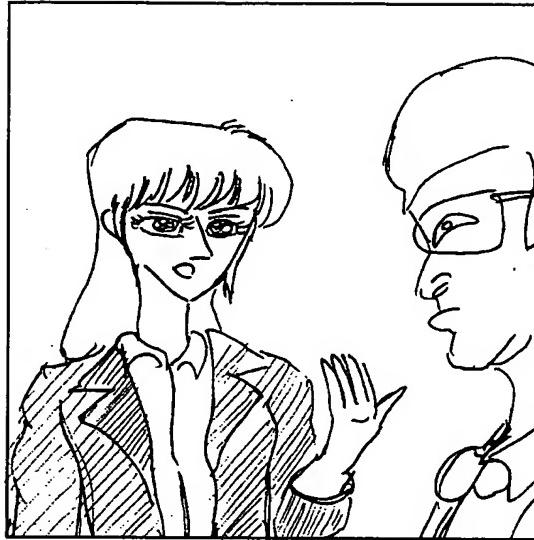

BDにおけるACCESS UNIT #100の音声 アップデートキットにおけるACCESS UNIT #100の音声


He had a person at one's nod.

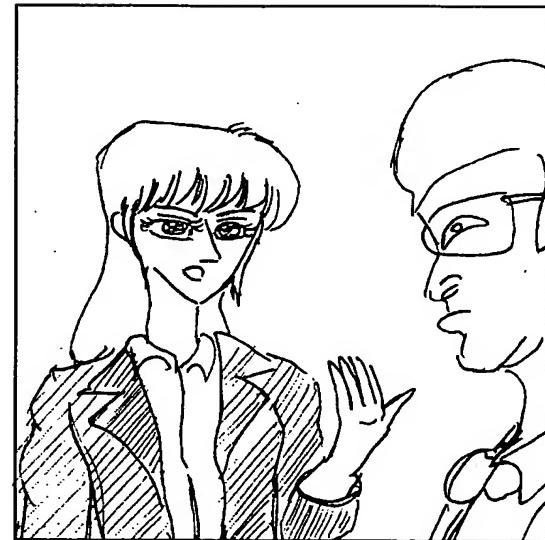


彼は人をアゴで使っている。

【図22】

(a)

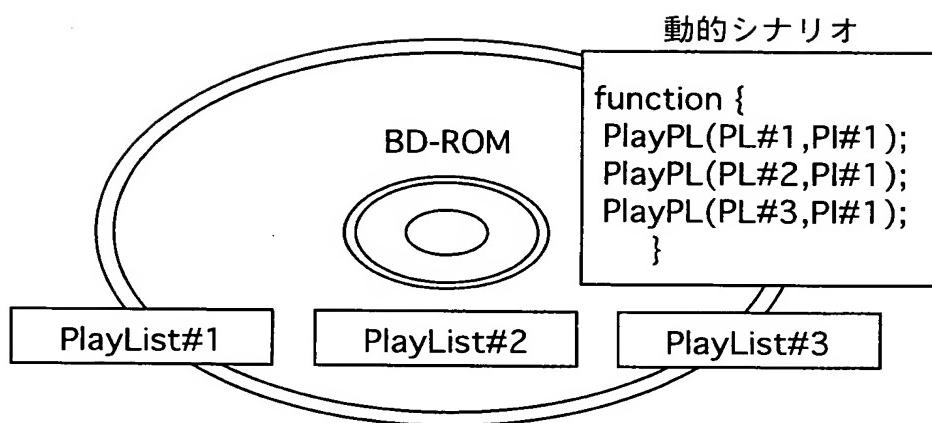

(b)

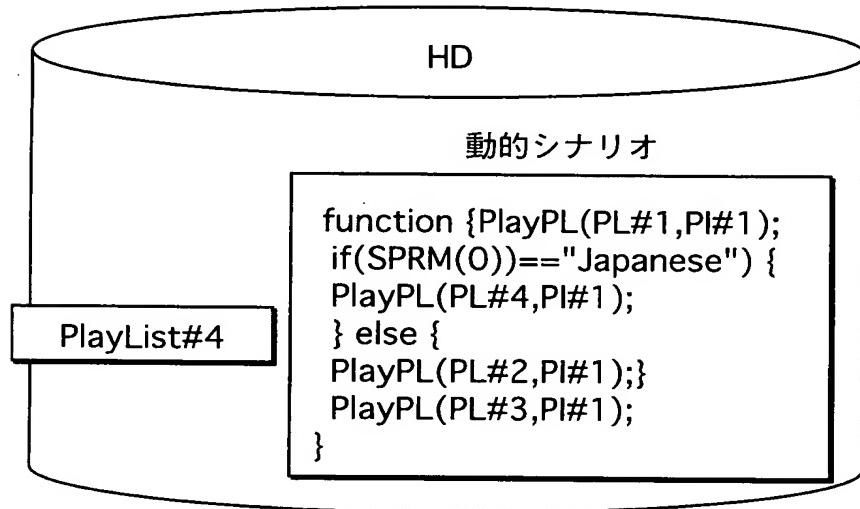

【図23】

(a)


米国公開版



```
function{
    PlayPL(PL#1,PI#1);
    PlayPL(PL#2,PI#1);
    PlayPL(PL#3,PI#1);
}
```

(b)

日本公開版

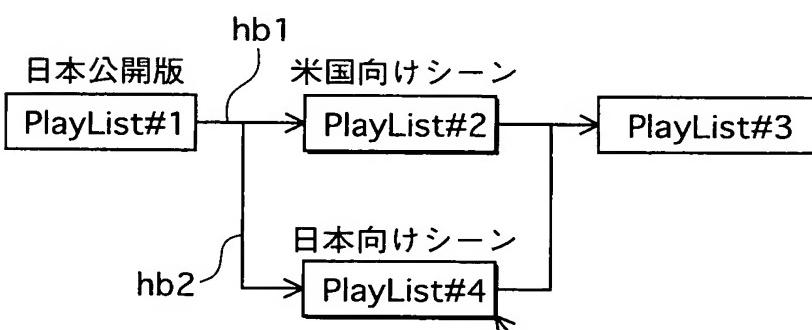

```
function{PlayPL(PL#1,PI#1)
if(SPRM(0)=="Japanese"){
    PlayPL(PL#4,PI#1);
}else{
    PlayPL(PL#2,PI#1);
    PlayPL(PL#3,PI#1);
}}
```

Diagram (b) also includes a code block showing a function that handles the playback logic based on the language setting (SPRM(0)). If the setting is "Japanese", it plays 'PlayList#4'. Otherwise, it plays 'PlayList#2' and 'PlayList#3'. A curved arrow labeled 'ダウンロード' (Download) points from the bottom right towards the code block.